


STANDARD CONTINUOUS CORD LOOP SHADES

INSTALLATION & OPERATING INSTRUCTIONS

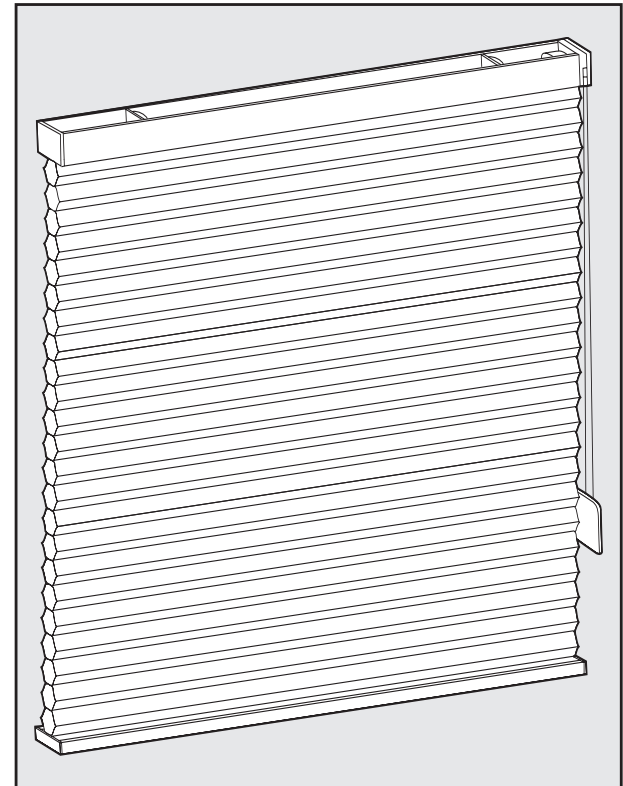

OPERATION

To lower shade, pull down on the back loop of the cord loop. The shade will stop when fully lowered. To raise, pull on the front loop of the cord loop.

CLEANING AND CARE

The Honeycomb fabric is easy to care for. Regular dusting with a feather duster or vacuum cleaner brush is recommended. Most stains can be blotted with a damp sponge and mild detergent. For problem stains, the shade can be removed from the Installation brackets and soaked in warm water.


Important: DO NOT immerse headrail in water. When damp, raise shade tightly to re-crisp pleats. Before using anything stronger than mild detergent and lukewarm water, test an unobtrusive corner of the shade. If you have any questions, call your dealer for advice.

CONTINUOUS CORD LOOP SHADE BASICS

ATTACHING THE BRACKETS


Larger shades may require additional brackets. Space additional brackets equally and align with the end brackets.

Note placement of components inside headrail. Brackets must be placed in the open areas between components to avoid interfering with the operating mechanism. Mark these locations on top of window frame for inside mount or on wall for outside mount.




Inside Mount

Mount brackets to top or back of window frame, 1" – 6" in from edge of frame. Make sure brackets are aligned with one another.




Outside Mount

Center shade over window opening at desired height. Mark the position of the headrail ends on the wall. Attach mounting brackets to the wall, 1" – 6" in from the marks, making sure brackets are aligned with one another.




Mounting with Extension Brackets

If you need to project the shade out from the mounting surface, use the supplied nuts and bolts to attach mounting brackets to the desired position in the extension bracket. With pliers, bend and break the unused part of the extension bracket. Attach extension brackets to mounting surface, making sure brackets are spaced as noted above.




ATTACHING THE BRACKETS

Center shade in window opening. Insert the front clip of the bracket into the front groove of the rail. Push the rail back and up until the back clips of the bracket snap into the back groove of the rail.



ATTACHING THE OPTIONAL HOLD-DOWN BRACKETS

Optional Hold Down Brackets are mounted with the supplied screws. With the shade at its proper drop, place the pin of each Hold Down into the hole in each End Cap and mark the screw holes. Make sure the pins are level and aligned. Raise the shade, then screw the Hold Down Bracket into the mounting surface.



OPERATING YOUR SHADE

To lower shade, pull down on the back loop of the cord loop. The shade will stop when fully lowered. To raise, pull on the front loop of the cord loop.

REMOVING YOUR SHADE

Using your fingers or a screwdriver, press tab on back of each bracket to release the shade.

