
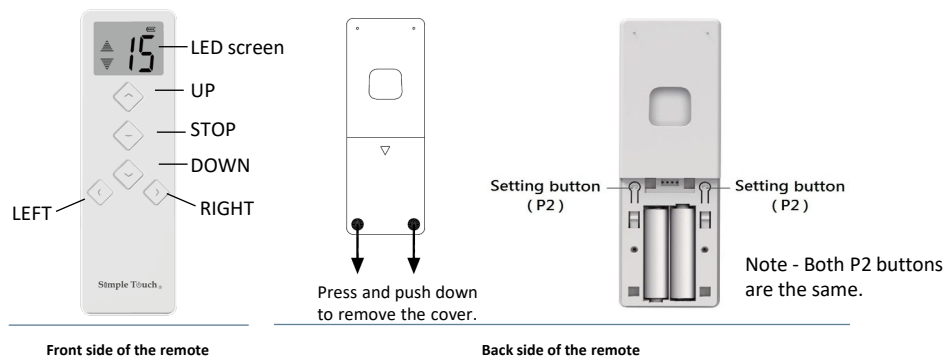


Simple Touch® Motorized Cellular Shade 15-Channel Remote Programming Guide

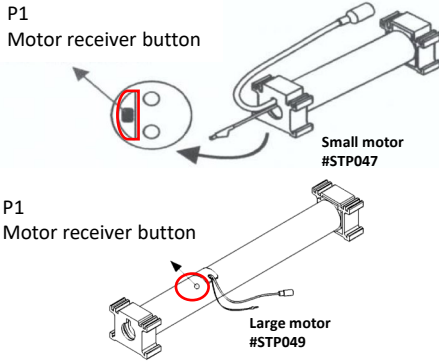


- The 15-channel remote is powered by 2 of AAA Alkaline batteries. Replacing the batteries doesn't affect the setting of the shades.
- Group control is on channel #0.

Option to set up "MY FAVORITE POSITION" if you prefer, simply follow the instructions below. Once you have set it up, you will be able to quickly access your preferred position with just the press of the STOP button.

Optional Programming Instructions

PROGRAMMING FOR MY FAVORITE POSITION

Set Up My Favorite Position



Step 1. Click the **LEFT** or **Right** buttons to select the channel you wish to program.

Step 2. Raise the shade all the way up by clicking the **UP** button. Skip this step if the shade is already at the top position.

Step 3. Adjust the bottom rail to your favorite height by clicking the **DOWN** or **UP** buttons.

Step 4. Click either one of the **P2** buttons. The shade jogs once.

JOG x 1

Step 5. Click the **STOP** button once. The shade jogs once.

JOG x 1

Step 6. Click the **STOP** button again. The shade jogs twice.

JOG x 2

My favorite position set up is done.

Remove My Favorite Position

Step 1. Click either one of the **P2** buttons. The shade jogs once.

JOG x 1

Step 2. Click the **STOP** button once. The shade jogs once.

JOG x 1


Step 3. Click the **STOP** button again. The shade jogs once.

JOG x 1

Remove My Favorite Position is done.

Use the single-channel remote to adjust the limits if you have a Simply motorized shade with a single-channel remote.

ADJUST THE TOP LIMIT



Step 1. Click the **LEFT** or **Right** buttons to select the channel you wish to program.

Step 1. Press the **STOP** and **UP** buttons for about 5 seconds until the shade jogs once.

JOG x 1


Step 2. Use the remote to control the shade to the desired upper position.

Step 3. Press the **STOP** and **UP** buttons for about 2-3 seconds until the shade jogs twice.

JOG x 2

Adjust the top limit is done.

ADJUST THE BOTTOM LIMIT to fit your window height



Step 1. Press the **STOP** and **DOWN** buttons for about 5 seconds until the shade jogs once.

JOG x 1


Step 2. Use the remote to control the bottom rail to fit your window height.

Step 3. Press the **STOP** and **DOWN** buttons for about 2-3 seconds until the shade jogs twice.



JOG x 2

Adjust the bottom limit is done.



ADD/ REMOVE A DUPLICATED REMOTE CONTROL

ADD 	Step 1. Select the channel you wish to copy by clicking the LEFT or RIGHT buttons.	
	Step 2. Click one of the P2 buttons once on the existing remote. The shade jogs once.	JOG x 1
	Step 3. Click the same P2 button again. The shade jog once.	JOG x 1
	Step 4. Select the channel you wish to copy on the NEW remote by clicking the LEFT or RIGHT buttons.	JOG x 2
	Step 5. Click one of the P2 buttons on the new remote. The shade jogs twice.	
REMOVE	Process the step1 to 5 above to remove the remote.	

LOCK/ UNLOCK 3 FRONT BUTTONS to prevent resetting the top and bottom limits


LOCK 	Step 1. Press and hold the STOP button until “ L ” shown on the screen (about 15-20 seconds).	
	Step 2. Click P2 button once, then the “half 0” symbol will be shown on the screen. The lock setup is done.	
UNLOCK 	Step 1. Press and hold the STOP button until “ U ” shown on the screen (about 15-20 seconds).	
	Step 2. Click P2 button once, then the “half 0” symbol will be shown on the screen. The unlock setup is done.	

ADJUST THE MOTOR SPEED (Three speeds are available. When you don't get two jogs in the latest programming step, that means the motor is either at the highest or the lowest speed.)

ACCEL 	Step 1. Click one of the P2 buttons once. The shade jogs once.	JOG x 1
	Step 2. Click the UP button. The shade jogs once.	JOG x 1
	Step 3. Click the UP button again. The shade jogs twice.	JOG x 2
DECELERATE 	Step 1. Click one of the P2 buttons once. The shade jogs once.	JOG x 1
	Step 2. Click the DOWN button. The shade jogs once.	JOG x 1
	Step 3. Click the DOWN button again. The shade jogs twice.	JOG x 2

REVERSE THE MOTOR DIRECTION

P1 motor receiver button




Step 1. Press the **P1** button on the shade you wish to program until the shade jogs 3 times (about 10 seconds). The location of the P1 button can be found on page 1.

JOG x 3

NOTE. The **P1** button is at side of the small motor or on the top of the larger motor. Refer to page 1 for the P1 locations.

FACTORY RESET

P1 motor receiver button



Step 1. Press the **P1** button on the shade you wish to reset until the shade jogs 4 times (about 15 seconds).

JOG x 4

Note. DO NOT RELEASE the P1 button during this step. If accidentally release it, please must redo it again. Different numbers of jogs will result in different settings.

PAIR THE REMOTE TO THE SHADE

P1 motor receiver button



Step 1. Press the **P1** button on the same shade about 2-3 seconds. The shade jogs once.

JOG x 1

Step 2. Select the channel on the remote.

Step 3. Press the **STOP** button on the remote for about 2-3 seconds. The shade jogs twice.

JOG x 2

Make sure you stay at the same channel.

SET UP THE TOP AND BOTTOM LIMIT

TOP Limit



Step 1. Move the shade to the top position by pressing the **UP** button.

Step 2. Press both **UP** and **STOP** buttons for about 2-3 seconds. The shade jogs twice.

JOG x 2

Bottom Limit



Step 1. Move the bottom rail to the bottom position by pressing the **DOWN** button.

Step 2. Press both **DOWN** and **STOP** buttons for about 2-3 seconds. The shade jogs twice.

JOG x 2

In the rare instance that you may have to do the “FACTORY RESET”, follow the steps at right. Then, complete the programming of “PAIR THE REMOTE TO THE SHADE” and “set up TOP & BOTTOM LIMITS” before operating the motorized shade again.